


Ablution Trough - PWD

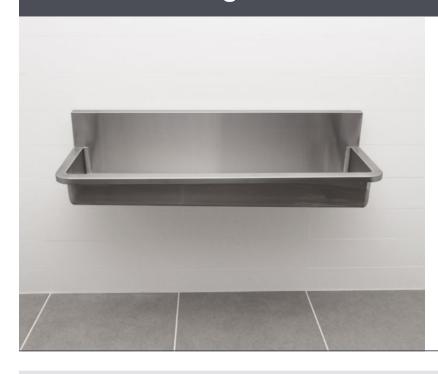

A wall mounted stainless steel drinking or ablution trough with an upstand to conceal plumbing. Suited to use in schools and childcare centres.

Technical Data		
Product	Ablution Trough - PWD Pattern	
Material	Gr304 Stainless Steel	
Material Thickness	1.2mm	
Material Surface Finish	Satin Finished	
Type of mounting	Wall mounted on Brackets	Product Code: 02-3509
Bowl Corners	Fully Radiused	
External Corners	Radiused	
Overall length	from 900 to 2400mm	
Overall Width	380mm	
Overall Depth	150mm	
Outlet Size	DN50 (50 BSP)	
Outlet Position	Left or Right hand only	
Front and End Facias	25mm	
Rear	150 x 40mm upstand to conceal pipework	
Tap Holes	Available in upstand	
Options	150mm upstand to either or both ends	Product Code: 02-3500
	Stainless Steel Wall Brackets	Product Code: 02-3530
	Stainless Steel Legs	Product Code: 02-3554


The information in this sheet reflects the current technical specifications at the time of publication. As part of our continuous improvement program, we reserve the right to change the technical or physical specifications without notice.




Tel: (03) 9465 4131 Fax: (03) 9465 1478



Ablution Trough - PWD

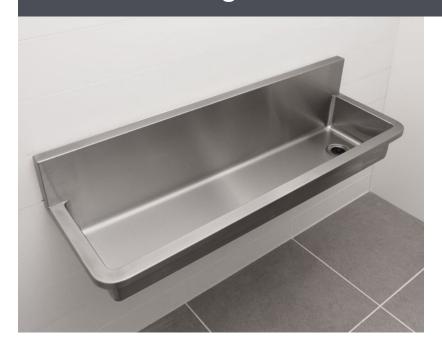

- Radius corners in bowl
- External Radius Corners
- Suitable for wall mounted tapware or bubblers
- 40mm thick upstands to conceal plumbing
- Suited to use in schools or childcare centres
- Custom versions can be made to suit specific applications

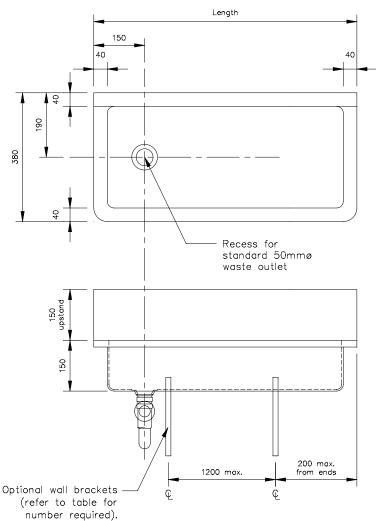

Brackets (optional):		
Available in Stainless Steel or Mild Steel		
No. of Brackets Required	Length of trough	
2	Upto 1600mm	
3	1600 to 2800mm	
4	2800 to 4000mm	

Tap Holes Set Out:		
Recommended spacing		
Adult usage	600mm	
Child usage	450mm	